

SAFES

VAULTS AND VAULT DOORS

CATALOGUE 2016



Chubbsafes
Trusted the world over.

MAKE SECURITY A PART OF YOUR EVERYDAY LIFE

Trusted the world over, Chubb safes is the oldest brand for safes, vaults and vault doors in the world. Chubb safes solutions are well known and appreciated for their unique combination of robustness, reliability and modern designs. Having provided high-quality protection solutions for almost two centuries, Chubb safes combines experience with innovation to create trustworthy products for maximum protection against burglary, fire and explosives. The Chubb safes solutions are rigorously tested by international and independent accreditation bodies to guarantee the best protection available.



Chubb safes
Trusted the world over.

CONTENTS

FINDING YOUR SAFE	5
TEST STANDARDS & PRODUCT OVERVIEW	6
LOCKING OPTIONS	9
PRODUCTS	
CUSTOMER CARE	46
OPTIONAL FITTINGS	48

ICONS EXPLAINED



CERTIFIED SAFES	Primus	10
	Evolve	11
	DuoGuard G0-I	12
	DuoGuard GII	13
	ProGuard	14
	Trident	15
HOME SAFES	Air	16
	Earth	17
	Water	18
	Fire	19
	Alpha	20
	Alpha Plus	21
	Epsilon	22
	Zeta	23
	Rhino Mk II	24
HOTEL SAFES	Air Hotel	25
DEPOSIT SAFES	Air Counter Unit	26
	Sigma Deposit	27
	Omega Deposit	28
	ProGuard DT	29
FIRE SAFES	Duplex	30
	DPC	31
	DataGuard NT	32
	DataPlus+	33
	Micro 40 & 80	34
	CS 300 Series	35
	Executive	36
FIRE FILES	Fire File 25"	37
	Fire File 31"	38
	Ultra Fire File 31"	39
	Binder Fire File	40
	Lateral Fire File	41
STORAGE CABINETS	ForceGuard	42
	Archive Cabinet	43
	Mekanno	44
VAULTS & VAULT DOORS	Centurion	45



SIMPLY FIND YOUR PRODUCT

The Chubb Safes Product Selector is designed to assist you in finding the right product. It is easy to navigate and helps you determine what you are looking for by product feature, valuable to protect, locking solution or protection needed. Not sure which safe to choose to protect your documents, your electronics or jewellery? The Chubb Safes Product Selector helps you compare products in order to make the right purchasing decision.

CHECK IT OUT AND FIND YOUR NEAREST LOCAL
CHUBBSAFES CONTACT ON WWW.CHUBBSAFES.COM

WHICH **SAFE** IS RIGHT FOR YOU?

The most important initial question is what you want to protect – cash and valuables, documents or data media?

CASH AND VALUABLES

Choose from the burglary protection range. This includes safes, cabinets, vaults & vault doors, designed to withstand physical attacks in different strengths or Grades. Each Grade represents a particular “cash rating” which is the amount an insurer will cover*.

*The actual amount of cover can vary between insurance companies and country, and may be different to the manufacturer’s recommended rating. You should always check what cover your insurance company is prepared to offer.

DOCUMENTS AND DATA MEDIA

Choose from the fire protection range which includes safes and filing cabinets designed to keep documents or data media safe from the effects of a fire.

DOCUMENTS

To survive a fire, documents require protection from temperatures higher than 177°C. Therefore cabinets have to be specifically designed, tested and then certified for this task. Without a credible certification, you cannot be sure that your documents are safe.

DATA MEDIA

The same is valid for data media, except here the cabinet must offer much greater protection due to the sensitivity of the material. If the inside of the cabinet exceeds a mere 55°C, then the information on a CD, DVD or tape will be destroyed.



CERTIFIED STRENGTH

To provide the appropriate level of protection, the products are tested to comply with the latest industry standards. The various certification tests carried out in independent laboratories for burglary or fire protection are conducted by experienced operators armed with plans of the product and a whole range of tools.

FOR BURGLARY PROTECTION, safes and vaults are awarded grades:

- For security cabinets, there are Grades S1 and S2 (EN 11450).
- For safes, vaults and vault doors, they are rated from Grade 0 to Grade XIII (EN 1143-1) and from class TL-15 to class 3 (UL 687 and UL 608).
- High security locks are graded according to EN 1300 or UL 1034 and security doors sets, windows and partitions are ranked from RC1 to RC6 (EN 1127).

During the certification process, door panels of the products, bolt works, locks and handles are tested. The certification tests include an attack program that is devised so that various break-in attempts can be made using a selection of tools. A correlation between tool type and the time for which each one is used can be used to obtain a resistance score (resistance unit). The higher the score, the higher the level of resistance. Based on the results obtained, the safe is given a classification and then listed in a resistance grade.

FOR FIRE PROTECTION, these standards vary according to whether you want to protect paper documents, digital media or other highly sensitive objects. This is because the temperature at which data media (e.g. 52°C) and documents (e.g. 177°C) deteriorate differs according to the item protected:

- In order to fully protect data media, industry standards indicate that products should carry ECB·S EN 1047-1, UL 72 Class 125 or NT Fire 017 60/120 DIS.


The ECB·S and UL tests monitor the internal temperature of the data cabinet until it has completely cooled down during the “soakout” period. Assessing products during this period is essential, since internal temperatures can peak up to six to eight hours after a fire has been extinguished. Such tests ensure that all products are comprehensively tested and, upon passing, will fully protect your data media for the specific time period stated.

- For document protection, all products must have an appropriate industry standard 30- or 60-minute paper certificate.


UL72-Class 350, ECB·S EN 1047-1, EN 15659 or NT Fire 017 are acceptable standards for paper document protection.

LEVELS OF RESISTANCE

Alongside extremely strict standards, you will also find a number of others that are less stringent in terms of resistance.

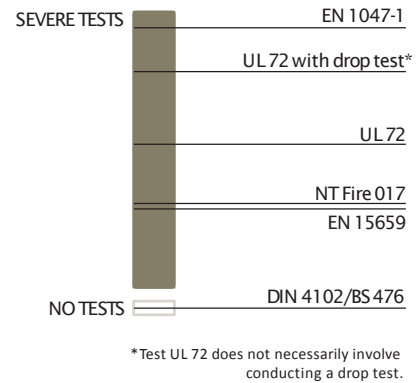

HIGHEST ALLOWED INSIDE TEMPERATURE

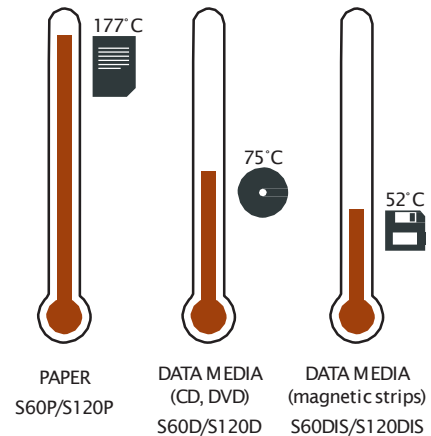

STANDARDS IN BRIEF

STANDARDS	TEMPERATURE TEST	DROP TEST	PAPER	DATA MEDIA	COOLING
EN 1047-1	1090°C	9.15 metres	S 60P (60 min.) / S 120P (120 min.)	S 60DIS (60 min.) / S 120DIS (120 min.)	incl. the cooling period
UL 72	1000°C	9.15 metres*	Class 350 (1/2, 1, 2 hours)	Class 125 (½, 1, 2 hours)	incl. the cooling period
EN 15659	850°C	no	LFS 30P (30 min.) / LFS 60P (60 min.)	no application	not tested
NT Fire 017	927°C	no	60 paper (60 min.) / 120 paper (120 min.)	60 diskettes (60 min.) / 120 diskette (120 min.)	not tested
DIN 4102/BS 476	not tested	not tested	not tested	not tested	not tested

*Test UL 72 does not necessarily involve conducting a drop test.

EUROPEAN CERTIFICATION FOR SAFES, VAULTS AND VAULT DOORS EXPLAINED

In order to attest to the quality of a certified product, an information plate is adhered to the inside of the product. This provides you with guarantees that the product has been tested and manufactured in an environment that has been checked by the certifying body.

Below is shown the ECB•S label and the details listed on the information plate.

BURGLARY PROTECTION CERTIFICATION

SERIAL NO.
Each product can be identified by a unique serial number. This number is given by the certifying body

EN 1143-1/EN 14450
The European standard that the product meets

CERT. MARK. NO.
Certificate number issued by the certifying body

RESISTANCE GRADE
Resistance classes

WEIGHT
The safe's net weight. A 15% tolerance in the net weight indicated is accepted

YEAR OF MANUFACTURE
The year that the product was manufactured

Through partnerships entered into with the ECB-S, the bodies listed here issue identical certificates: VdS (Germany), ICIM (Italy), a2p (France), SBSC (Sweden).

FIRE PROTECTION CERTIFICATION

SERIAL NO.
Each product can be identified by a unique serial number. This number is given by the certifying body

EN 1047-1/EN 15659
The European standard that the product meets

CERT. MARK. NO.
Certificate number issued by the certifying body

PROTECTION CLASS
Resistance classes

WEIGHT
The safe's net weight. A 15% tolerance in the net weight indicated is accepted

YEAR OF MANUFACTURE
The year that the product was manufactured

Fire certification is issued by independent approved laboratories. Here are some examples of test institutes and certificates that you may encounter: ECB-S, UL, iBMB, MPA Dresden, Applus RTD, SP, VdS.

FOR MORE DETAILED INFORMATION, contact your insurance company or visit the chubb safes.com website.

SAFES, VAULTS AND VAULT DOORS **BY CERTIFICATION**

PRODUCT	CERTIFICATION STANDARD	PROTECTION OR RESISTANCE LEVEL	CERTIFICATION BODY
BURGLARY PROTECTION			
Air	n/a	n/a	n/a
Earth	EN 14450	Level S2	ECB · S
Water	EN 14450	Level S1	ECB · S
Alpha	n/a	n/a	n/a
Alpha Plus	n/a	n/a	n/a
Epsilon	n/a	n/a	n/a
Zeta	EN 1143-1	Grade I	ECB · S
Air Hotel	n/a	n/a	n/a
Primus	EN 1143-1 & EN 15659	Grade I & LFS 30 P	ECB · S
Evolve	EN 1143-1	Grade I	ECB · S
ProGuard	EN 1143-1	Grade II to III	ECB · S
Air Counter Unit	n/a	n/a	n/a
Sigma Deposit	n/a	n/a	n/a
Omega Deposit	n/a	n/a	n/a
ProGuard DT	EN 1143-2	Grade DI to DII	ECB · S
ForceGuard	n/a	n/a	n/a
Mekanno	n/a	n/a	n/a
FIRE PROTECTION			
CS 300 Series	EN 1047-1	S 60 P to S 120 P	ECB · S
Executive	NT Fire 017 & UL 72 Class 350	60 min Paper & 1h Fire	SP & UL
Archive Cabinet	n/a	n/a	n/a
Rhino Mk II	EN 14450 & S 1037	Level S2 & 60 min Fire	ECB · S & JIS
DataGuard NT	NT Fire 017	120 min Diskette	SP
Micro 40 & 80	EN 1047-1	S 60 DIS	ECB · S
Fire File 25"	UL 72 Class 350	1h Fire	UL
Fire File 31"	UL 72 Class 350	1h to 2h Fire	UL
Ultra Fire File 31"	UL 72 Class 350	1h to 2h Fire	UL
Binder Fire File	UL 72 Class 350	2h Fire	UL
Lateral Fire File	UL 72 Class 350	1h Fire	UL
COMBINED BURGLARY AND FIRE PROTECTION			
Fire	EN 14450 & EN 15659	Level S2 & LFS 30 P	ECB · S
DuoGuard	EN 1143-1 & EN 1147-1	Grade 0 to I & S 60 P	ECB · S
DuoGuard GII	EN 1143-1 & NT Fire 017	Grade II & 90 min Paper	ECB · S & SP
Duplex	EN 14450 & EN 15659	Level S2 and 60 min Paper	ECB · S
DPC	UL 72 Class 350	2h	UL
DataPlus+	EN 14450 & EN 1047-1 & UL 72 Class 125	Level S2 & 120 min Diskette	ECB · S & UL
Centurion	EN 1143-1	Grade V to IX, X (CD), XI (CD)	ECB · S & MPA DRESDEN
COMBINED BURGLARY-, FIRE- AND EXPLOSIVE PROTECTION			
Trident	EN 1143-1 & NT Fire 017	Grade III to VI & Grades IV EX to VI EX & 60 min Paper	ECB · S & SP

LOCKING OPTIONS

Depending on the range, you can customise your product with a different lock. Thus you can benefit from a comprehensive lock offering that includes the latest industry solutions, which offer a wide range of features. So whether it be the “mechanical combination” lock or an electronic solution, you can be sure to have a lock that will meet your security needs. Below the key terms associated with the range of locks.

Definitions:

KEY LOCK: A manual key-operated lock.

MECHANICAL COMBINATION: A mechanical keyless dial lock with a changeable combination.

ELECTRONIC LOCK: An electronically-operated keypad lock with a changeable combination.

MANAGER MODE: Allows one user to control the functions of other combination holders.

NUMBER OF USERS: The number of users able to program in their own access code.

DURESS FEATURE: An alarm engineer can link the lock into a monitored alarm system. Then, using a given procedure, the lock can be operated, the safe opened and a silent signal given to the monitoring station that this is being done under duress.

TIME DELAY: This feature allows for a pre-set delay between operating the lock and being able to open the safe. The operation may vary between lock types.

TIME LOCK: Time lock allows the user to set periods during which the lock may be operated, e.g. during business hours only. The options available will vary between locks.

AUDIT TRAIL: The lock is able to give a report (it will vary in detail from model to model) of usage and may show times of operation, codes used and operations performed.

DUAL CONTROL: Allows two users to enter their details before any operation can be performed.

PLANNING, DELIVERY & INSTALLATION

Once you have selected a product, you can also chose the installation survey option. We will then agree with you on a flexible installation schedule. The flexibility of the installation process is evidence of Gunnebo's commitment to ensuring the cost- and time-efficient completion of your purchase.

Our products are delivered and installed by trained Gunnebo installers. Whatever the delivery environment (e.g. large bank or small office), you can be assured that the installers will take the greatest care. We are also focused on making sure the service on offer is achievable to the highest standards of workmanship, and is promptly completed within the contracted timescales.



**КОМБИНИРАНА
ЗАЩИТА СРЕЩУ
ВЗЛОМ И ПОЖАР В
ДОМА И ОФИСА**



HOME SAFE S2 30P




СЕЙФ ЗА ЗАЩИТА ОТ ВЗЛОМ И ПОЖАР

ХАРАКТЕРИСТИКИ

- Комбинирана защита от взлом и пожар едновременно.
- Сертифициран от ЕСВ•S - EN 14450, клас S2 срещу взлом.
- Сертифициран от ЕСВ•S - EN 15659 за 30 минутна защита от пожар на документи.
- Избор от 6 размера: от 11 до 91 литра обем.
- Избор от заключваща система за всички размери : EN 1300 сертифицирана брѝва - механична или електронна.
- Възможност за фиксиране към пода с включени комплекти от два анкерни болта.
- Идеален сейф за защита на пари в брой, ценности, паспорти и други ценни документи в дома и офиса.
- Вратата на сейфа е подсиѝрена с революционна заключваща система с V-образни резета. Новият дизайн на заключващите резета усилва защитата на вратата срещу взлом и по време на пожар.

HOME SAFE S2 30P

ПРОДУКТИВИ ХАРАКТЕРИСТИКИ

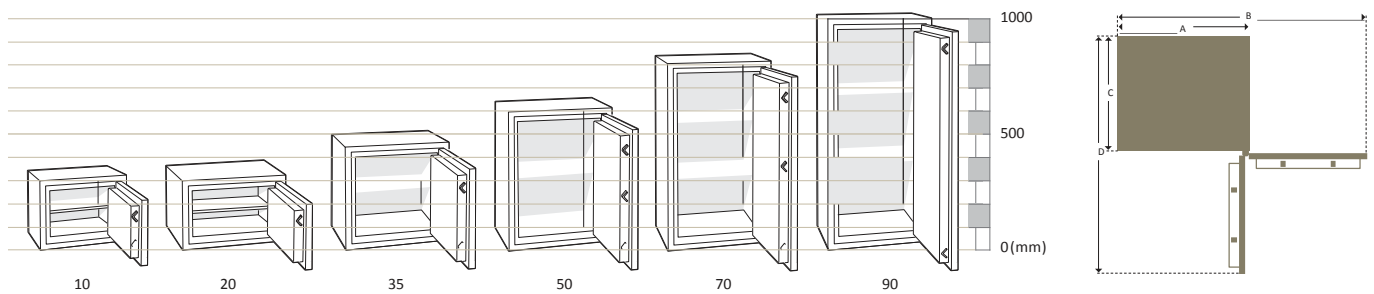

Модел	Външна вис. (mm)	Външна шир. (mm)	Външна дълб. (mm)	Широчина при отворена врата 180° (B)	Дълб. при отворена врата 90° (D)	Вътрешна вис. (mm)	Вътрешна шир. (mm)	Вътрешна дълб. (mm)	Обем (литри)	Маса (кг)	Рафт
10	300	360	300	662	627	210	270	191	11	21	1
20	300	445	390	832	803	210	355	281	21	28	1
35	450	445	390	832	803	360	355	281	36	38	1
50	600	445	390	832	803	510	355	281	51	46	1
70	800	445	390	832	803	710	355	281	71	59	2
90	1000	445	390	832	803	910	355	281	91	72	2

Пантите увеличават с 20mm дължината (C) показана по-горе. При стандартния модел с електронна бравата се увеличава с дълбочината 30mm.

БРАВИ ОПЦИИ

Всички размери сейфове могат да бъдат оборудвани с механична или електронна бртва. Всички брави са сертифицирани от ЕСВ•S в съответствие с Европейския Стандарт EN1300.



МЕХАНИЧНА БРАВА

Моделите с механична бртва се отварят и затварят с помощта на вкарания в бравата ключ.



ЕЛЕКТРОННА БРАВА

Електронната бртва може да бъде програмирана от потребителя с шест-цифрен персонален код, който се запазва от бравата и се ползва всеки път при отваряне на сейфа. При затворена врата на сейфа и завъртане на клавиатурата сейфът се заключва. Батерията използвана за електронната бртва се намира вътре в клавиатурата и може лесно да се подмени при изтощаване, при което сейфът остава заключен.

Authorized dealer

СЕРТИФИКАТИ

30P ЗА ЗАЩИТА ОТ ПОЖАР

Цялата серия е сертифицирана от ЕСВ•S в съответствие с Европейския стандарт EN 15659, който гарантира 30-минутна защита на документи в случай на пожар.

НИВО S2 ЗА ЗАЩИТА ОТ ВЗЛОМ

Всички размери сейфове са сертифицирани от ЕСВ•S в съответствие с Европейския стандарт EN 14450 за защита от взлом Ниво S2.

КОНСТРУКЦИЯ

Стените и вратата на сейфа са конструирани така, че вътрешните и външните стени са изработени от здрава стоманена, а вътрешността е запълнена със специален материал за осигуряване на висока защита срещу взлом и пожар разработен от Chubb Safes. Този материал осигурява висок клас на изпълнение с ниска маса, позволяваща монтиране на сейфа почти навсякъде!

www.chubbsafes.com



MODEL SHOWN: PRIMUS 280 EL

PRIMUS

BURGLARY- & FIRE-RESISTANT SAFE



KEY FEATURES

- Enhanced ergonomic design ideal for home or office
- Dual resistance against burglary and fire certified by ECB•S according to EN 1143-1, Grade I for burglary protection
- Certified by ECB•S according to EN 15659, LFS 30 P for up to 30 minutes of fire protection
- One model fitting for under the desk use
- Lock alternatives: EN 1300-certified Class A key lock or EN 1300-certified Class B electronic lock
- Choice of 5 sizes ranging from 24 to 284 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
25	340	500	345	262	424	216	24	93	1 shelf
45	460	440	430	382	364	300	42	119	1 shelf
140	638	650	550	560	574	420	135	233	2 shelves
190	840	650	550	762	574	420	184	287	2 shelves
280	1241	650	554	1168	574	424	284	386	2 shelves

Dimensions exclude handle and hinge projections.



MODEL SHOWN: EVOLVE M185

EVOLVE

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Ergonomic handle-free safe ideal for home, office or retail environments
- Automated opening and locking system
- Certified by ECB• according to EN 1143-1, Grade I for burglary protection
- Optimised comfort with keypad lock positioned on top of the door
- Innovative storage option for quick and easy access
- Lock alternatives: EN 1300-certified Class B electronic lock
- Choice of 3 sizes ranging from 100 to 185 litres
- Optional internal fittings: removable shelf, pull-out drawer, inner door shelf. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
M100	690	600	500	590	500	328	100	151	1 shelf
M125	876	600	500	776	500	328	125	186	2 shelves
M185	1200	600	500	1100	500	328	185	247	2 shelves

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48


Dimensions exclude handle and hinge projections.



MODEL SHOWN: DUOGUARD 450

DUOGUARD

BURGLARY- & FIRE-RESISTANT SAFE



KEY FEATURES

- Combined resistance against burglary and fire, ideal for office and retail environments
- Certified by ECB•S according to EN 1143-1, Grade 0 and I for burglary protection
- Certified by ECB•S according to EN 1147-1 for fire protection of paper documents for up to 60 minutes
- Dualite new composite barrier-material to ensure dual protection while reducing total weight to minimise transport and installation cost
- Three-way solid steel boltwork, active relocker and anti-drilling plates for enhanced security
- Ergonomic soft-touch handle for comfort in use
- Data media insert certified 60 Diskette by NT Fire 017 for up to 60 minutes fire protection
- Maximised storage capacity with customisable capabilities
- Lock alternatives: EN 1300-certified Class A key lock and/or EN 1300-certified Class B electronic lock
- Choice of 8 sizes ranging from 40 to 443 litres
- Optional internal fittings: removable shelf, extendable shelf, lockable drawer, lockable compartment, extensible tray, file frame. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
40	435	500	456	335	400	295	40	90	1 shelf
60	530	500	521	430	400	360	62	115	1 shelf
110	690	600	561	590	500	386	114	161	2 shelves
150	875	600	561	775	500	386	150	196	2 shelves
200	1150	600	561	1050	500	386	203	243	2 shelves
300	1600	600	561	1500	500	386	290	322	3 shelves
350	1600	675	585	1500	575	410	354	352	3 shelves
450	1850	675	615	1750	575	440	443	415	4 shelves

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48


Dimensions exclude handle and hinge projections.



MODEL SHOWN: DUOGUARD GII 110 KL

DUOGUARD GII

BURGLARY- & FIRE-RESISTANT SAFE



KEY FEATURES

- Combined resistance against burglary and fire, ideal for office and retail environments
- Certified by ECB•S according to EN 1143-1, Grade II for burglary protection
- Approved by SP Technical Research Institute of Sweden according to NT Fire 017 for fire protection of paper documents for up to 90 minutes
- Dualite new composite barrier-material to ensure dual protection while reducing total weight to minimise transport and installation cost
- Three-way solid steel boltwork, active relocker and anti-drilling plates for enhanced security
- Ergonomic soft-touch handle for comfort in use
- Data media insert certified 60 Diskette by NT Fire 017 for up to 60 minutes fire protection
- Maximised storage capacity with customisable capabilities
- Choice of 8 sizes ranging from 40 to 443 litres
- Optional internal fittings: removable shelf, extendable shelf, lockable drawer, lockable compartment, extensible tray, suspension file frame. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
65	578	526	547	452	400	360	65	303	1 shelf
110	716	626	587	590	500	386	114	430	2 shelves
150	901	626	587	775	500	386	150	500	2 shelves
200	1176	626	587	1050	500	386	203	649	2 shelves
300	1626	626	587	1500	500	386	290	861	3 shelves
350	1626	701	611	1500	575	410	354	945	3 shelves
450	1876	701	641	1750	575	440	443	1100	4 shelves

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

Dimensions exclude handle and hinge projections.



MODEL SHOWN: PROGUARD 350 KL

PROGUARD

BURGLARY-RESISTANT SAFE



KEY FEATURES

- High-level of burglary resistance for your office and high-risk sites
- Certified by ECB•S according to EN 1143-1, Grade II and III for burglary protection
- Special barrier-material to ensure burglary resistance while reducing total weight to minimise transport and installation cost
- Three-way boltwork constructed with solid steel bolts
- Active relocker and anti-drilling plates in the boltwork for enhanced impenetrability
- Reduced wall-thickness for greater storage capacity
- Ergonomic soft-touch handle for enhanced comfort
- Lock alternatives:
 - EN 1300-certified Class A key lock and/or
 - EN 1300-certified Class B electronic lock
 - Dual locking from model 110 and up
- Choice of 8 sizes ranging from 62 to 463 litres
- Optional internal fittings: removable shelf, extendable shelf, lockable drawer, lockable compartment, extensible trays, file frame. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)						INTERNAL (mm)						Volume (litres)		Weight (kg)	
	Height		Width		Depth		Height		Width		Depth					
	Gr II	Gr III	Gr II	Gr III	Gr II	Gr III	Gr II	Gr III	Gr II	Gr III	Gr II	Gr III	Gr II	Gr III	Gr II	Gr III
60	530	–	500	–	521	–	430	–	400	–	360	–	62	–	234	–
110	690	690	600	600	561	561	590	600	500	510	386	396	114	121	334	315
150	875	875	600	600	561	561	775	785	500	510	386	396	150	159	402	377
200	1150	1150	600	600	561	561	1050	1060	500	510	386	396	203	214	501	486
300	1600	1600	600	600	561	561	1500	1510	500	510	386	396	290	305	744	655
350	1600	1600	675	675	585	585	1500	1510	575	585	410	420	354	371	846	703
360	–	1295	–	785	–	620	–	1205	–	695	–	530	–	363	–	656
450	1850	1850	675	675	616	615	1750	1760	575	585	440	450	443	463	981	813

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

Dimensions exclude handle and hinge projections.



MODEL SHOWN: TRIDENT 600

TRIDENT

BURGLARY-, FIRE- & EXPLOSIVE-RESISTANT SAFE



KEY FEATURES

- Triple resistance against burglary, fire and explosives, ideal for high-risk sites such as banks, retail environments, jewellers or pawnshops
- Certified by ECB•S according to EN 1143-1, Grades III to VI for burglary protection
- Certified by SP Technical Research Institute of Sweden according to NT Fire 017 – 60 Paper for fire protection for up to 60 minutes
- Certified by ECB•S according to EN 1143-1, Grades III EX to VI EX for explosives protection
- Optional core drill protection
- Alarm cabling abilities for sophisticated resistance
- Sober design and ergonomic three spoke handle
- Available with the door hung on the right or the left
- Customised internal fittings for maximised storage
- Optional safe deposit lockers columns
- Lock alternatives:
 - EN 1300-certified key locks
 - EN 1300-certified combination locks
 - EN 1300-certified Class B and C electronic locks
- Choice of 8 models for each grade ranging from 111 to 1117 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)				No. of doors
	Height	Width	Depth	Height	Width	Depth		Gr III	Gr IV	Gr V	Gr VI	
110	790	730	560	620	560	320	111	540	560	595	635	1
170	920	730	640	750	560	400	168	670	695	740	790	1
210	920	730	740	750	560	500	210	745	775	825	880	1
310	1270	730	740	1100	560	500	308	970	1005	1075	1150	1
420	1470	810	740	1300	640	500	416	1180	1225	1310	1400	1
600	1850	880	740	1680	710	500	596	1530	1590	1695	1810	1
910	1850	1250	740	1680	1080	500	907	1990	2060	2195	2350	2
1120	1850	1500	740	1680	1330	500	1117	2295	2380	2535	2710	2

Dimensions exclude handle and hinge projections.



MODEL SHOWN: AIR 10 EL



AIR

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Compact safe, ideal for home or office
- 4mm-thick steel door, 2mm-thick steel body frame
- Choice of key lock or electronic lock
- Special models for hotel and laptop storage
- Choice of 2 sizes, 9 and 16 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Air 10	200	310	200	190	300	150	9	7	–
Air 15	250	350	250	240	340	200	16	10	1 shelf
Air 25 Laptop	200	430	350	190	420	300	24	12	–
Air Hotel	200	430	350	190	420	300	24	12	–

Dimensions exclude handle and hinge projections.



MODEL SHOWN: EARTH 55 EL

EARTH

BURGLARY-RESISTANT SAFE



KEY FEATURES

- Cost-efficient storage solution for your home or office
- Certified by ECB•S according to EN 14450 standards, Level S2 burglary protection
- Double-walled body built from steel plates and a fire-retardant material
- Interior LED light on electronic lock models
- Lock alternatives: EN 1300-certified Class A key lock or EN 1300-certified Class B electronic lock
- Choice of 4 sizes ranging from 15 to 76 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Earth 15	300	370	350	210	280	250	15	38	1 shelf
Earth 40	440	450	400	350	360	300	38	60	1 shelf
Earth 55	590	450	400	500	360	300	54	76	1 shelf
Earth 75	790	450	400	700	360	300	76	92	1 shelf

Dimensions exclude handle and hinge projections.



MODEL SHOWN: WATER 40 KL



WATER

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Cost-efficient storage solution for your home or office
- Certified by ECB•S according to EN 14450, Level S1 for burglary protection
- Steel door & body, anti drilling plates in the boltwork
- Interior LED lighting on electronic lock models
- Lock alternatives: EN 1300-certified Class A key lock or EN 1300-certified Class B electronic lock
- Choice of 5 sizes ranging from 29 to 96 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Water 30	275	375	350	269	369	294	29	31	1 shelf
Water 40	375	375	350	369	369	294	40	36	1 shelf
Water 50-1	375	475	350	369	469	294	51	43	1 shelf
Water 50-2	475	375	350	469	369	294	51	43	1 shelf
Water 95	700	475	350	694	469	294	96	72	1 shelf

Dimensions exclude handle and hinge projections.



MODEL SHOWN: FIRE 50 EL

FIRE



EN 15659
LFS 30 P

EN 14450
S2

BURGLARY- & FIRE-RESISTANT SAFE

KEY FEATURES

- Combined burglary and fire protection in one safe
- Certified by ECB•S according to EN 14450, Level S2 for burglary protection
- Certified by ECB•S according to EN 15659, LFS 30 P for fire protection (up to 30 minutes)
- 92mm thick door, 56mm thick body frame
- Lock alternatives: EN 1300-certified Class A key lock or EN 1300-certified Class B electronic lock
- Choice of 5 sizes ranging from 13 to 51 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Fire 15	300	427	385	170	316	235	13	49	1 shelf
Fire 20	315	445	440	185	334	290	18	52	1 shelf
Fire 25	490	360	440	360	249	290	26	62	1 shelf
Fire 30	460	440	440	330	329	290	31	68	1 shelf
Fire 50	670	440	440	540	329	290	51	91	1 shelf

Dimensions exclude handle and hinge projections.



MODEL SHOWN: ALPHA 7 EL



ALPHA

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Easy to install storage protection for home
- 6mm-thick steel door, 3mm-thick steel body frame, 16mm diameter steel locking bolts
- Anchoring kit included to prevent unauthorised removal
- Lock alternatives:
 - Double-bitted key lock
 - Programmable electronic lock
 - Dual-control key and electronic lock
- Choice of 8 sizes ranging from 11 to 90 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 1	200	300	250	194	294	187	11	19	1 shelf
Sz 2	200	450	400	194	444	337	29	22	1 shelf
Sz 3	250	350	250	244	344	187	16	16	1 shelf
Sz 4	300	400	250	294	394	187	21	20	1 shelf
Sz 5	300	400	400	294	394	337	39	25	1 shelf
Sz 6	400	400	250	394	394	187	29	26	2 shelves
Sz 7	500	400	400	494	394	337	65	37	2 shelves
Sz 8	610	450	400	600	444	337	90	54	2 shelves

Dimensions exclude handle and hinge projections.



MODEL SHOWN: ALPHA PLUS 6 EL



ALPHA PLUS

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Cost-efficient storage solution for home and small office
- 6mm-thick steel door, 3mm-thick steel outer body frame, 2mm-thick steel inner body frame, mineral wool filling, 25mm diameter steel locking bolts
- Anchoring kit included to prevent from unauthorised removal
- Lock alternatives:
 - Double bitted key lock
 - Programmable electronic lock
- Choice of 6 sizes from 3 to 60 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 1	180	310	205	100	230	112	3	14	1 shelf
Sz 2	270	350	345	190	270	252	13	26	1 shelf
Sz 3	320	440	395	240	360	302	26	40	1 shelf
Sz 4	410	460	395	330	380	302	38	40	1 shelf
Sz 5	440	320	395	360	240	302	26	52	1 shelf
Sz 6	610	460	395	530	380	302	60	65	1 shelf

Dimensions exclude handle and hinge projections.



MODEL SHOWN: EPSILON 2 KL



EPSILON

BURGLARY-RESISTANT KEY SAFE

KEY FEATURES

- Economical solution with advanced protection
- Secure key deposit feature for better organised security at the workplace
- 6mm-thick steel door, 2mm-thick steel body, 16mm diameter steel locking bolts
- Anchoring kit included for easy wall installation
- Lock alternatives:
 - Double bitted key lock
 - Programmable electronic lock
 - Dual-control key and electronic lock
- Key capacity ranging from 88 to 208 keys
- Choice of 4 sizes ranging from 16 to 39 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Key capacity	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth				
Sz 1	500	400	130	496	396	77	16	18	88	Key hanging racks
Sz 2	500	400	180	496	396	127	25	23.5	128	Key hanging racks
Sz 3	500	400	200	496	396	147	29	24	168	Key hanging racks
Sz 4	500	400	250	496	396	197	39	27.5	208	Key hanging racks

Dimensions exclude handle and hinge projections.



MODEL SHOWN: ZETA 25 KL



ZETA

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Compact safe for discreet protection at home or small office
- Certified by ECB•S according to EN 1143-1, Grade I for burglary protection
- 8mm-thick steel door, 45mm-thick steel body, 25mm diameter steel locking bolts
- Anchoring lit included to prevent unauthorised removal
- Lock alternatives: EN 1300-certified Class A key lock or EN 1300-certified Class B electronic lock
- Choice of 2 sizes, 13 and 26 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 15	280	370	350	190	280	250	13	40	1 shelf
Sz 25	330	450	400	240	360	300	26	54	1 shelf

Dimensions exclude handle and hinge projections.



MODEL SHOWN: RHINO MK II 5 KL

RHINO MK II

BURGLARY- & FIRE-RESISTANT SAFE



KEY FEATURES

- Convenient and user-friendly safe with combined resistance against burglary and fire, ideal for home or office
- Certified by ECB•S according to EN 14450, Level S2 for burglary protection
- Certified by JIS according to S 1037 for up to 60 minutes fire protection
- 35mm-thick steel door, 65mm-thick steel body frame, 28.5mm diameter steel moving bolts
- Special materials for unrivalled fire resistance
- Anchoring kit included to prevent from unauthorised removal
- Lock alternatives:
 - Double bitted key lock
 - Three-wheel combination locks
- Choice of 8 sizes ranging from 11 to 90 litres
- Optional internal fittings: removable shelf, extendable drawer. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Size 1	400	500	502	270	370	320	32	185	1 shelf, 1 drawer
Size 2	600	500	502	470	370	320	56	225	1 shelf, 1 drawer
Size 3	750	500	502	620	370	320	73	265	1 shelf, 1 drawer
Size 4	750	630	602	620	500	420	130	373	1 shelf, 1 drawer
Size 5	980	630	602	850	500	420	179	467	1 shelf, 1 drawer

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

Dimensions exclude handle and hinge projections.



MODEL SHOWN: AIR HOTEL



AIR HOTEL

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Compact safe for burglary protection in hotel rooms, student residences or other high-turnover accommodations
- 4mm-thick steel door, 2mm-thick steel body frame
- Anchoring kit included to prevent from unauthorised removal
- Lock alternatives: Electronic lock with audit trail

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)
	Height	Width	Depth	Height	Width	Depth		
AIR Hotel EL	200	430	350	190	420	300	24	12

Dimensions exclude handle and hinge projections.



PRODUCT SHOWN: AIR COUNTER UNIT



AIR COUNTER UNIT

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Ready-to-use deposit solution at cash tills
- Under the counter installation for discreet use
- Solid sheet steel construction
- Easy-to-reach deposit slot
- Alternative locks: 2 key locks, one to open the storage unit and 1 to release it from the counter

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			Weight (kg)	Deposit capacity
	Height	Width	Depth		
ACU 350	235	105	190	2.4	up to 350 banknotes

Dimensions exclude handle and hinge projections.



MODEL SHOWN: SIGMA DEPOSIT SIZE 2 KL



SIGMA DEPOSIT

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Easy-to-operate deposit solution for burglary protection
- 8mm plate steel door, 25mm steel frame, 25mm diameter steel locking bolts
- Anti-fishing device included to prevent retrieval of deposited cash
- Anchoring kit included to prevent unauthorised removal
- Lock alternatives:
 - Double bitted 8-lever key lock
 - Programmable electronic lock
 - Dual control key and electronic lock
- Choice of 3 sizes ranging from 32 to 50 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)
	Height	Width	Depth	Height	Width	Depth		
Sz 1	305	375	350	299	369	289	32	27
Sz 2	375	375	350	369	369	289	39	33
Sz 3	475	375	350	469	369	289	50	38

Dimensions exclude handle and hinge projections. Deposit Slot measures 170mm wide x 16mm high.



MODEL SHOWN: OMEGA DEPOSIT 2 KL



OMEGA DEPOSIT

BURGLARY-RESISTANT SAFE

KEY FEATURES

- Burglary protection for your cash deposits, ideal for retailers
- 10mm steel door, 6mm steel frame, 20mm diameter steel locking bolts
- Anti-fishing device included to prevent removal of deposits once deposited into chute
- Anchoring kit included to prevent unauthorised removal
- Lock alternatives:
 - Double bitted 8-lever key lock
 - Programmable electronic lock
 - Dual control key and electronic lock
- Choice of 2 sizes, 24 and 48 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
Sz 1	455	340	380	212	328	308	24	54	–
Sz 2	698	340	380	455	328	308	48	75	1 shelf

Dimensions exclude handle and hinge projections. Deposit opening measures 80mm high x 265mm wide x 220mm deep.



MODEL SHOWN: PROGUARD DT 150 KL

PROGUARD DT



BURGLARY-RESISTANT SAFE

KEY FEATURES

- Cash deposit solution ideal for environments in which large amounts of cash are handled
- Certified by EN 1143-2, Grades D1 and D2 for burglary protection
- New composite barrier-material to ensure high-levels of protection while reducing total weight to minimise transport and installation cost
- Three-way solid steel boltwork, active relocker and anti-drilling plates
- Anti-fishing device to prevent removal of deposits once deposited into chute
- Choice of 4 sizes ranging from 45 to 180 litres
- Lock alternatives:
 - EN 1300-certified Class A key lock and/or
 - EN 1300-certified Class B electronic lock
- Ergonomic soft-touch handle for comfort in use

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume* (litres)	Weight (kg)		Standard internal fittings
	Height	Width	Depth	Height	Width	Depth		Grade I	Grade II	
60	687	500	521	314	400	360	45	144	329	1 drawer
110	847	600	561	474	500	386	91	203	464	1 drawer
150	1052	600	561	659	500	386	127	242	554	1 drawer
200	1307	600	561	934	500	386	180	290	665	1 drawer

Dimensions exclude handle and hinge projections. *Useable volume below deposit and anti-fishing device.



MODEL SHOWN: DUPLEX 550 KL

DUPLEX

FIRE-RESISTANT DOCUMENT CABINET



KEY FEATURES

- Combined fire and burglary resistance for documents in your office place
- Certified by ECB•S according to EN 15659, Level LFS 60 P for up to 60 minutes fire protection of documents
- Certified by ECB•S according to EN 14450, Level S2 for burglary protection
- Anchor points in the base to fix the cabinet on the floor
- Low-height model designed for under the window installation
- Internal ladder racking system for flexible positioning of the fittings
- Lock alternatives:
 - EN 1300-certified Class A key lock
 - Series of electronic locks
- Choice of 3 sizes ranging from 446 to 773 litres with double doors for all models
- Optional internal fittings: removable shelf, suspension file frame. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight* (kg)	Standard internal fittings**
	Height	Width	Depth	Height	Width	Depth			
450	1200	1250	585	1030	1110	390	446	440	2 shelves
550	1950	940	585	1760	800	390	550	460	4 shelves
775	1950	1250	585	1785	1110	390	773	650	4 shelves

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

Dimensions exclude handle and hinge projections. *Product weight can fluctuate +/- 10%. **Shelves are designed to accept hanging folders.



MODEL SHOWN: DOCUMENT PROTECTION CABINETS 400W

DPC

FIRE-RESISTANT DOCUMENT CABINET



KEY FEATURES

- High-capacity storage solution with fire protection, ideal for office environments such as banks, financial institutions...
- Certified by Underwriter's Laboratories according to UL 72 Class 350 for up to 120 minutes fire protection
- Automated mechanism to ensure bolts resist fire whenever the door is closed
- Interlocking systems for double doors models to prevent the safe from being left open
- Anchoring kit to fix the safe on the floor and prevent from unauthorised removal
- Lock alternatives:
 - Series of key locks
 - Combination lock
 - Series of electronic locks
- Choice of high-capacity sizes from 160 to 670 litres
- Optional internal fittings: removable shelf, pull-out file frame, pull-out shelf, lockable drawer, lockable cupboard. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
160	859	759	605	700	600	382	160	235	1 shelf
240	1209	759	605	1050	600	382	240	315	2 shelves
400W	1209	1160	605	1050	1000	382	401	500	2 shelves
320	1559	759	605	1400	600	382	321	395	3 shelves
400T	1909	759	605	1750	600	382	401	470	4 shelves
670	1909	1160	605	1750	1000	382	670	650	4 shelves

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

Dimensions exclude handle and hinge projections.



MODEL SHOWN: DATAGUARD NT 80 EL



DATAGUARD NT

FIRE-RESISTANT DATA MEDIA SAFE

KEY FEATURES

- Fire-resistant safe for data media protection
- Certified by SP Technical Research Institute of Sweden according to NT Fire 017 – 120 Diskette for up to 120 minutes data media fire protection
- Easy slam action closing for full fire protection without the door being locked
- Effective design with single door safe for maximised storage
- Lock alternatives:
 - Key lock
 - Programmable electronic lock
- Choice of 4 sizes ranging from 30 to 128 litres
- Optional internal fittings: adjustable shelf, extendable drawer. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
25	530	546	566	280	346	306	30	145	1 shelf
40	700	546	566	450	346	306	48	190	1 shelf, 1 drawer
80	1025	546	590	775	346	330	89	263	1 shelf, 2 drawers
120	1025	702	590	775	502	330	128	330	1 shelf, 2 drawers

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

*External heights and depths include plinth and handle projection. **Internal heights and widths are also equal to the clear opening measurements.



MODEL SHOWN: DATAPLUS+ 1 KL

DATAPLUS+

FIRE-RESISTANT DATA MEDIA SAFE



KEY FEATURES

- Combined fire and burglary protection for data media in office environments
- Certified by ECB•S according to EN 14450, Level S2 for burglary protection
- Certified by ECB•S according to EN 1047-1 for up to 120 minutes data media fire protection
- Tested by Underwriter's Laboratories according to UL 72
- Low weight barrier material that optimise cost, transport and installation
- Easy slam-action emergency closing
- Anchor point to prevent unauthorised removal
- Lock alternatives:
 - Key lock
 - Series of electronic locks with audit trail
- Choice of 5 sizes ranging from 111 to 556 litres
- Optional internal fittings: adjustable shelf, pull-out platform, lockable cupboard (size 5), suspended pocket shelf. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight* (kg)
	Height	Width	Depth**	Height	Width	Depth		
Size 1	911	746	780	565	490	400	111	315
Size 2	1191	746	780	845	490	400	167	390
Size 3	1471	746	780	1125	490	400	221	490
Size 4	1941	746	780	1595	490	400	313	640
Size 5	1941	1036	830	1570	780	450	556	860

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

*Weight refers to an empty cabinet. **Gross measurement inc. 60mm for handle which can be removed for installation.



MODEL SHOWN: MICRO 40



MICRO 40 & 80

FIRE-RESISTANT DATA MEDIA SAFE

KEY FEATURES

- High-quality fire-resistant safe for data media in office places
- Certified by ECB•S according to EN 1047-1, S 60 DIS for up to 60 minutes data media fire protection
- Innovative shock-absorbing plinth to ensure data media stays safe even if the floor collapses as a result of fire
- Stylish light grey finish that fit any office environments
- Lock alternatives:
 - Key lock
 - Series of electronic locks
- Choice of 2 sizes, 37 and 81 litres
- Customisable internal fittings: adjustable self, pull-out shelf, pull-out drawer with dividers. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)
	Height	Width	Depth	Height	Width	Depth		
Micro 40	644	544	566	370	320	320	37	135
Micro 80	723	644	671	450	420	430	81	195

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

Dimensions exclude handle and hinge projections.



MODEL SHOWN: CS 300 SERIES 304

CS 300 SERIES

FIRE-RESISTANT DOCUMENT CABINET



KEY FEATURES

- Ergonomic storage solution constructed with high quality materials
- Certified by ECB•S according to EN 1047-1 for up to 120 minutes fire protection of paper documents
- Wide range of customised internal fittings to suit diverse storage requirements.
- Light-grey stylish design suitable for most office environments
- Choice of 3 sizes ranging from 178 to 840 litres
- Lock alternatives:
 - Key lock
 - Series of electronic locks
- Optional internal fittings: adjustable shelf, pull-out shelf, top loading suspension file frame, front loading suspension file frame, lockable compartment, data insert. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Fire Protection (min)
	Height	Width	Depth	Height	Width	Depth			
CS 302	1403	890	664	1203	733	434	383	458	120
CS 304	1970	1250	664	1770	1093	434	840	801	120

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

Dimensions exclude handle and hinge projections.



MODEL SHOWN: EXECUTIVE 65 KL

EXECUTIVE

FIRE-RESISTANT DOCUMENT SAFE



KEY FEATURES

- Ready-to-use document storage solution with fire protection
- Certified by SP Technical Research Institute of Sweden according to NT Fire 017 for up to 60 minutes fire protection of documents
- Certified by Underwriter's Laboratories according to Class 350 for up to 60 minutes fire protection of documents
- Special fire-resistant solid barrier material constructed with a 50mm-thick body and 66mm-thick door thicknesses
- Anchoring kit to securely fix the safe in the floor and prevent any unauthorised removal
- Lock alternatives:
 - Cylinder lock with a secure flat profile key
 - Programmable electronic lock
- Choice of 4 sizes ranging from 14 to 71 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
15	300	390	320	210	310	215	14	25	1 tray
25	345	425	450	240	320	320	25	45	1 tray
40	525	410	450	415	305	320	41	57	1 tray, 1 shelf
65	670	550	510	515	395	340	71	120	2 shelves

Dimensions exclude handle and hinge projections.



MODEL SHOWN: FIRE FILE 25" 4 DRAWERS

FIRE FILE 25"

FIRE-RESISTANT DOCUMENT FILE



KEY FEATURES

- Fire resistant filing cabinet for document storage in office environments
- Certified by Underwriter's Laboratories according to Standard 72, Class 350 Endurance for up to 60 minutes fire protection
- Interlocking system preventing more than one drawer from opening at once and eliminating risk of tipping
- Day-catch fitted to each drawer to ensure that the contents are protected from fire as long as a drawer has been pushed closed, even if the cabinet is unlocked
- The contents of the closed drawers are completely protected from fire even if one of the drawers has left open.
- High-quality steel sliders for easy access and use.
- Efficient design for high-capacity storage: available in 2 or 4 drawers
- Lock alternatives:
 - Key lock
 - Combination lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			DRAWER (mm)			Volume (litres)	Weight (kg)	Fire Protection (min)
	Height	Width	Depth	Height	Width	Depth			
25" 1 hour									
2 drawers	784	551	635	290	387	460	104	164	60
4 drawers	1510	551	635	290	387	460	208	291	60

Dimensions exclude handle and hinge projections.



MODEL SHOWN: FIRE FILE 31" 4 DRAWERS

FIRE FILE 31"

FIRE-RESISTANT DOCUMENT FILE



KEY FEATURES

- Fire resistant filing cabinet for document storage in office environments
- Certified by Underwriter's Laboratories according to Standard 72, Class 350 Endurance for up to 120 minutes fire protection
- Interlocking system preventing more than one drawer from opening at once and eliminating risk of tipping
- Day-catch fitted to each drawer to ensure that the contents are protected from fire as long as a drawer has been pushed closed, even if the cabinet is unlocked
- The contents of the closed drawers are completely protected from fire even if one of the drawers has left open.
- High-quality steel sliders for easy access and use.
- Efficient design for high-capacity storage: available in 2, 3 and 4 drawers
- Lock alternatives:
 - Key lock
 - Combination lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			DRAWER (mm)			Volume (litres)	Weight (kg)	Fire Protection (min)
	Height	Width	Depth	Height	Width	Depth			
1 hour									
2 drawers	784	551	779	290	387	604	136	194	60
3 drawers	1147	551	779	290	387	604	204	268	60
4 drawers	1510	551	779	290	387	604	272	321	60
2 hours									
2 drawers	784	551	779	290	387	604	136	197	120
3 drawers	1147	551	779	290	387	604	204	273	120
4 drawers	1510	551	779	290	387	604	272	328	120


Dimensions exclude handle and hinge projections.



ULTRA FIRE FILE 31" MODEL 4 DRAWERS

ULTRA FIRE FILE 31"

FIRE-RESISTANT DOCUMENT FILE



KEY FEATURES

- Fire resistant filing cabinet for document storage in office environments
- Certified by Underwriter's Laboratories according to Standard 72, Class 350 Endurance and impact for up to 60 minutes and 120 minutes fire protection
- A shock absorbing plinth provides maximum impact absorption in the event of a floor collapse in case of fire
- Interlocking system preventing more than one drawer from opening at once and eliminating risk of tipping
- Day-catch fitted to each drawer to ensure that the contents are protected from fire as long as a drawer has been pushed closed, even if the cabinet is unlocked
- On the 120min-certified models, the contents of the closed drawers are completely protected from fire even if one of the drawers has left open
- High-quality steel sliders for easy access and use
- Efficient design for high-capacity storage: available in 2, 3 and 4 drawers
- Lock alternatives:
 - Key lock
 - Combination lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			DRAWER (mm)			Volume (litres)	Weight (kg)	Fire Protection (min)
	Height	Width	Depth	Height	Width	Depth			
1 hour									
2 drawers	869	551	779	290	387	604	136	201	60
3 drawers	1222	551	779	290	387	604	204	275	60
4 drawers	1585	551	779	290	387	604	272	328	60
2 hours									
2 drawers	869	551	779	290	387	604	136	204	120
3 drawers	1222	551	779	290	387	604	204	280	120
4 drawers	1585	551	779	290	387	604	272	335	120

Dimensions exclude handle and hinge projections.



MODEL SHOWN: BINDER FIRE FILE 4 DRAWERS

BINDER FIRE FILE

FIRE-RESISTANT DOCUMENT FILE



KEY FEATURES

- Fire-resistant ring binder filing cabinet for document storage in office environments
- Certified by Underwriter's Laboratories according to Standard 72, Class 350 Endurance for up to 60 minutes and 120 minutes fire protection
- Low-weight material for reduced transportation and installation costs and lighter floor loads
- Day-catch fitted to each drawer to ensure that the contents are protected from fire as long as a drawer has been pushed closed, even if the cabinet is unlocked
- Insulation between drawers to protect content in case of a fire even if one of the drawers has left open.
- High-quality steel sliders for easy access and use.
- Efficient design for high-capacity storage: available in 3 and 4 drawers to hold up to 160 binders
- Lock alternatives:
 - Key lock
 - Combination lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			DRAWER (mm)			Weight (kg)	Binder capacity
	Height	Width	Depth	Height	Width	Depth		
3 drawers	1276	801	836	333	637	660	402	Up to 120 binders
4 drawers	1682	801	836	333	637	660	495	Up to 160 binders

Dimensions exclude handle and hinge projections.



MODEL SHOWN: LATERAL FIRE FILE 3 DRAWERS

LATERAL FIRE FILE

FIRE-RESISTANT DOCUMENT FILE



KEY FEATURES

- Fire-resistant lateral filing cabinets for document storage in office environments
- Certified by Underwriter's Laboratories according to Standard 72, Class 350 Endurance for up to 60 minutes fire protection
- Low-weight material for reduced transportation and installation costs and lighter floor loads
- Day-catch fitted to each drawer to ensure that the contents are protected from fire as long as a drawer has been pushed closed, even if the cabinet is unlocked
- Interlocking system preventing more than one drawer from opening at once and eliminating risk of tipping
- High-quality steel sliders for easy access and use
- Slim and space-saving cabinets for high-capacity storage: available in 3 and 4 drawers
- Lock alternatives:
 - Key lock
 - Combination lock

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Fire Protection (min)
	Height	Width	Depth	Height	Width	Depth			
3 drawers	1147	964	586	290	800	387	270	328	60
4 drawers	1510	964	586	290	800	387	359	411	60

Dimensions exclude handle and hinge projections.



MODEL SHOWN: FORCEGUARD 190

FORCEGUARD

BURGLARY-RESISTANT CABINET



KEY FEATURES

- Efficient design for the storage of valuable bulk items at office environments
- Single-wall body constructed with 3mm solid steel, 52mm steel door, 20mm diameter steel locking bolts
- Relocking device for additional protection against forced entry
- Anchor points to allow the cabinet to be fixed on the floor
- Lock alternatives:
 - EN 1300-certified Class A key lock or
 - EN 1300-certified Class B combination lock or
 - EN 1300-certified Class B electronic lock
- Choice of 4 sizes ranging from 236 to 920 litres

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
25	1000	600	450	975	575	400	236	80	2 shelves
45	1500	900	450	1475	875	400	534	140	3 shelves
140	1900	900	450	1875	875	400	680	225	4 shelves
190	1900	1220	450	1875	1195	400	920	275	4 shelves

Dimensions exclude handle and hinge projections.



MODEL SHOWN: ARCHIVE CABINET 450 KL



ARCHIVE CABINET

FIRE-RESISTANT DOCUMENT CABINET

KEY FEATURES

- Storage cabinets with fire protection in your office
- Double-wall construction with special fire-resistant barrier material
- Three-way solid steel boltwork for enhanced security
- Anchor points in base to fix the cabinet to the floor
- Wide fitting capabilities to suit a variety of storage requirements
- Lock alternatives: EN 1300-certified Class A key lock
- Choice of 4 sizes ranging from 325 to 880 litres
- Optional internal fittings: removable shelf, suspension file frame, lockable compartment. Read more on page 48

PRODUCT SPECIFICATIONS

Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
325	1500	700	550	1290	594	430	325	95	3 shelves
450	1950	700	550	1780	594	430	450	120	4 shelves
640	1950	950	550	1780	844	430	640	150	4 shelves
880	1950	1260	550	1780	1154	430	880	200	4 shelves

SPECIFICATIONS FOR OPTIONAL FITTINGS ARE AVAILABLE ON PAGE 48

Dimensions exclude handle and hinge projections.



MODEL SHOWN: CS MEKANNO 685

MEKANNO

BURGLARY-RESISTANT CABINET



KEY FEATURES

- On-site assembly security cabinet with burglary protection for convenient installation even in tight spaces
- Ideal for banking, retail, commercial, military and government offices
- 3mm solid steel body frame
- Anti-drill plate on locks for added protection against theft
- Anchor points to allow the cabinet to be fixed on the floor
- Mobile across different locations to suit different environments
- Efficient design with adjustable shelves for maximised storage
- Self-assembly in around 45 min by you, a Gunnebo approved partner or by the Gunnebo installation team
- Lock alternatives:
 - EN 1300-certified Class A double-bitted key lock
 - Optional “magic module” locks
 - Available with two locks if available
- Available in one size, 682 litres

PRODUCT SPECIFICATIONS


Model	EXTERNAL (mm)			INTERNAL (mm)			Volume (litres)	Weight (kg)	Standard internal fittings
	Height	Width	Depth	Height	Width	Depth			
685	1950	940	500	1785	868	440	682	265	4 shelves

Dimensions exclude handle and hinge projections.



CENTURION

BURGLARY-RESISTANT MODULAR VAULTS AND VAULT DOORS



KEY FEATURES

- Lightweight modular panels for quick and easy assembly, disassembly and extension
- Certified by ECB•S according to EN 1143-1 for burglary protection
- Reinforced structures for additional protection against mechanical and thermal tools
- Tested with a variety of tools such as crowbars, disc cutters, drills, sledgehammers and oxyacetylene torches
- Grades X and XI are certified “CD” for diamond drill protection
- Reduced wall thickness for maximised use of space
- Innovative certified ventilation system for optimal climate control
- Optional grill gate
- Upper and lower cable duct fitted in every panel
- Choice of colour finishes
- Choice of customisable finishes for vault exterior: plaster, clad with wood, metal panels
- Lock alternatives:
 - EN 1300-certified Class A and B key lock: Mauer 70079 and/or
 - EN 1300-certified Class B combination lock: S&G 6731 and/or
 - EN 1300-certified Class B and Class C electronic locks: GSL 1000, Paxos, SafeLock, Ganox, La Guard 39E
- Choice of 9 models ranging from Grades V to XI

PRODUCT SPECIFICATIONS

Model	Thickness defensive structure (mm)	Overall thickness (mm)	Clearance (mm)		Weight (kg)	Wall thickness (mm)	Number of bolts	Number of locks
			Height	Width				
Grade V	100	192	2000	900	1100	400	10	2
Grade VI	100	192	2000	900	1100	400	10	2
Grade VII	100	192	2000	900	1150	400	10	2
Grade VIII	180	272	2000	900	1800	400	10	2
Grade IX	180	272	2000	900	1850	400	10	2
Grade X (CD)	280	372	2000	900	2650	500	20	2
Grade XI (CD)	280	372	2000	900	2730	600	20	3

Dimensions exclude handle and hinge projections.

CUSTOMER CARE

Optimise the performance of your organisation's security equipment and systems: Chubb safes' range of maintenance, upgrade and retrofit, and auditing services is an invaluable investment for any company.

Security equipment and system failures can have a major impact on an organisation's image, reputation and bottom line. This is why many companies invest to ensure their security equipment performs at a high level and their systems adhere to safety and compliance standards.

The suite of Chubb safes services meets all of your upkeep, modernisation and evaluation needs. These services include maintenance and warranty services to provide preventative and corrective care; retrofit and upgrade services to keep current with the latest technology; and audit services to analyse your security equipment and processes.



AUDIT

Chubbbsafes' Audit services provide a structured analysis of your security systems and processes in terms of performance, utility, effectiveness, efficiency and legal compliance. The Audit services help you rectifying measures, as needed, to ensure peak performance and compliance with all local regulations.

KEY BENEFITS

- Reduced security systems failures, total cost of ownership and risk of non-compliance with local regulations
- Significant cost savings for security operations

WARRANTY PLUS

Warranty Plus from Chubbbsafes provides you with a valuable service partner from the moment of purchase. The range of Warranty Plus plans helps you to audit your equipment for any malfunction and, if a problem does arise, resolve it immediately with the help of our engineers.

KEY BENEFITS

- Choice of Gold or Platinum plans offering various response times (from 48 to 2 hours) and service hours (from 8 hours per day, 5 days per week, to 24/7)
- Access to Service Desk and/or Technical Helpdesk

MAINTENANCE

Chubbbsafes offers comprehensive maintenance services for your security equipment, including the following three types of service-level agreements:

- PREVENTATIVE: detect errors in advance
- CORRECTIVE: diagnose errors and restore your systems to normal
- PERFORMANCE: ensure peak performance through online real-time monitoring

KEY BENEFITS

- Access to Service Desk and/or Technical Helpdesk
- Rapid response time (as short as 2 hours after your first call)
- Maximum visibility and confidence in your strategic operations

UPGRADE AND RETROFIT

To avoid an investment in a full replacement, Chubbbsafes offers the following two management services:


- RETROFIT: replace obsolete hardware or software components to keep your equipment operational
- UPGRADE: migrate your equipment to the latest technology

KEY BENEFITS

- A variety of support stages available ranging from standard to extended
- Up-to-date functionalities that incorporate latest-available technology
- Risk-free implementation that maximises compatibility with existing systems

OPTIONAL FITTINGS

ARCHIVE CABINET

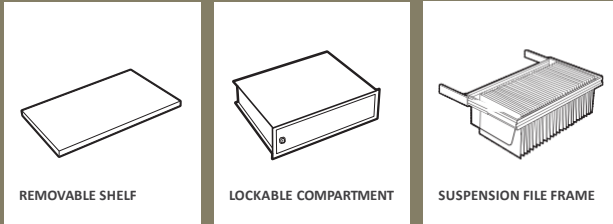


REMOVABLE SHELF

LOCKABLE COMPARTMENT

SUSPENSION FILE FRAME


DATAGUARD NT

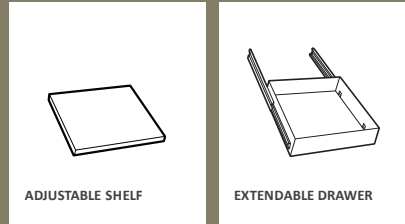

ADJUSTABLE SHELF

EXTENDABLE DRAWER

DATAPLUS+

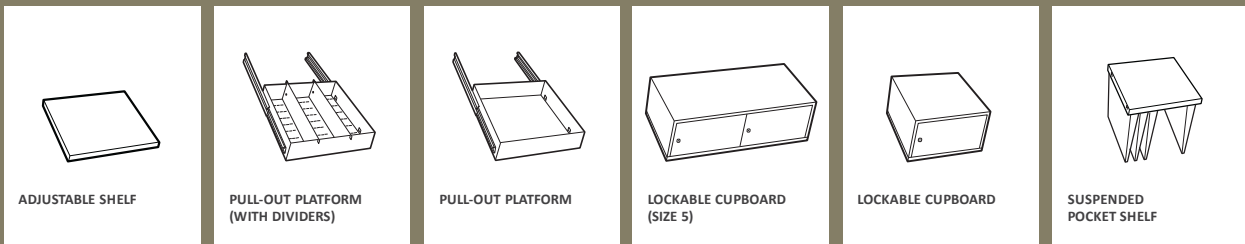

ADJUSTABLE SHELF

PULL-OUT PLATFORM
(WITH DIVIDERS)


PULL-OUT PLATFORM

LOCKABLE CUPBOARD
(SIZE 5)

LOCKABLE CUPBOARD

SUSPENDED
POCKET SHELF

DPC

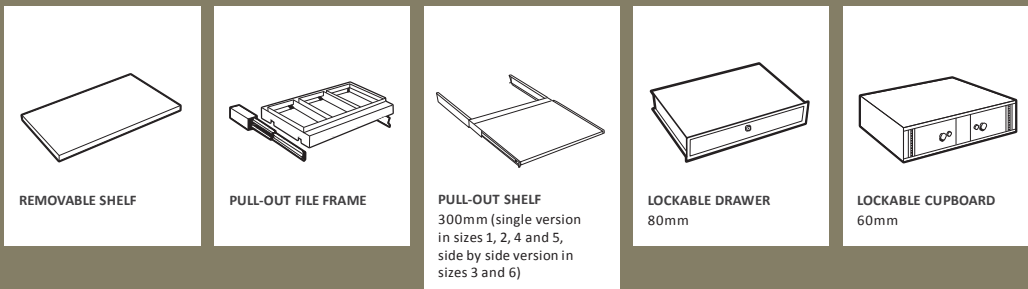

REMOVABLE SHELF


PULL-OUT FILE FRAME

PULL-OUT SHELF
300mm (single version
in sizes 1, 2, 4 and 5,
side by side version in
sizes 3 and 6)

LOCKABLE DRAWER
80mm

LOCKABLE CUPBOARD
60mm

DUOGUARD G0-GII

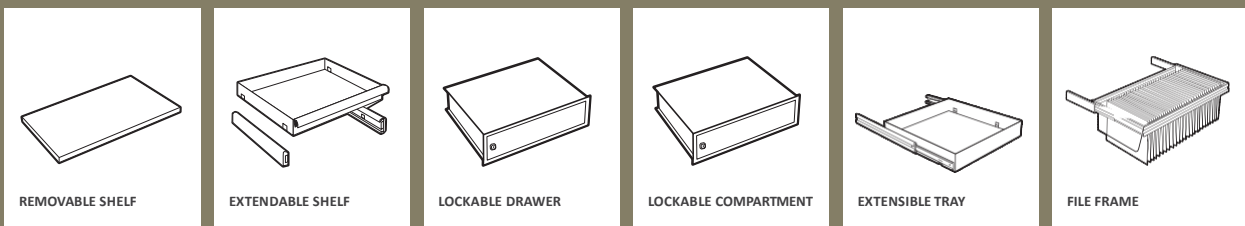

REMOVABLE SHELF

EXTENDABLE SHELF


LOCKABLE DRAWER

LOCKABLE COMPARTMENT


EXTENSIBLE TRAY

FILE FRAME

DUPLEX



REMOVABLE SHELF




SUSPENSION FILE FRAME


EVOLVE



REMOVABLE SHELF



PULL-OUT DRAWER




INNER DOOR SHELF


MICRO 40 & 80



ADJUSTABLE SHELF



PULL-OUT SHELF




PULL-OUT DRAWER


PROGUARD



REMOVABLE SHELF*
For 60: 20x375x350
For 110-300: 20x475x376
For 350: 20x550x400
For 360: 20x710x542
For 450: 20x550x430

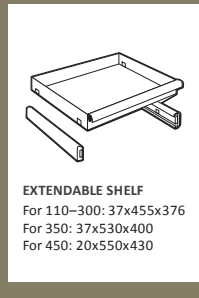


EXTENDABLE SHELF
For 110-300: 37x455x376
For 350: 37x530x400
For 450: 20x550x430

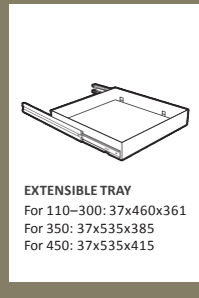


EXTENSIBLE TRAY
For 110-300: 37x460x361
For 350: 37x535x385
For 450: 37x535x415



LOCKABLE DRAWER
For 110-300: 100x460x336
For 350: 100x535x360
For 450: 100x535x390

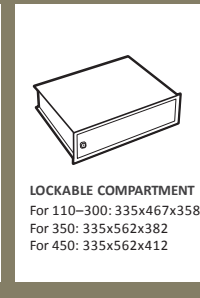

LOCKABLE COMPARTMENT
For 110-300: 335x467x358
For 350: 335x562x382
For 450: 335x562x412

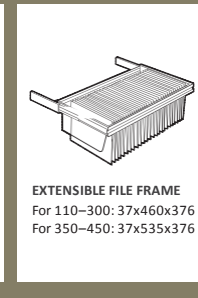


EXTENSIBLE FILE FRAME
For 110-300: 37x460x376
For 350-450: 37x535x376

*Reinforced shelf also available

RHINO MK II



REMOVABLE SHELF



EXTENDABLE DRAWER

www.chubbsafes.com

Authorised dealer

